




Technical Data	U.S. Units	Metric Units		
Cavity	T - I I A			
Body Features	Through port 2 with reverse flow check			
Body Type	Line mount			
Interface	None			
Open Cavity Quantity	I			
Weight	2.278 lb.	I,033 kg.		
Mounting Hole Thread	.375-16 UNC - 2B in.			
Mounting Hole Depth	.62 in.	15,7 mm		
Mounting Hole Quantity	2			
Includes integral cartridge(s)	Yes (see Included Components)			

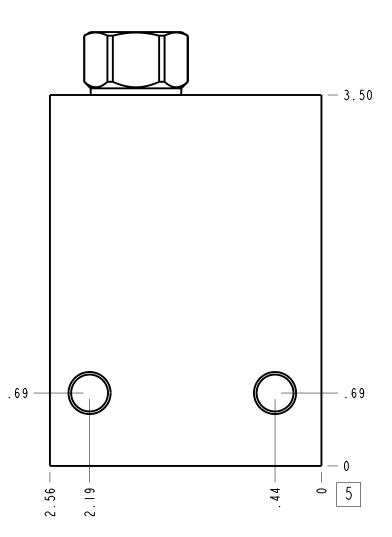

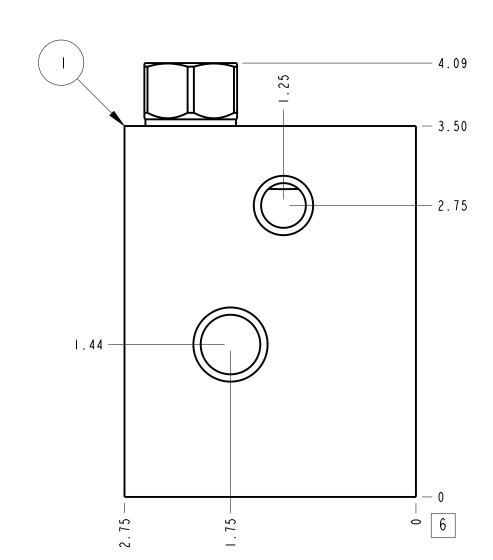

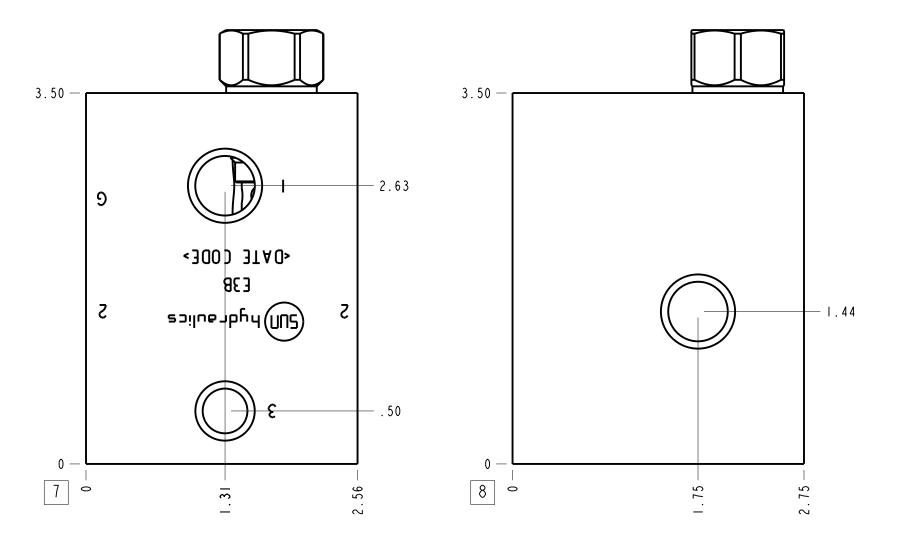


1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

<u>Notes</u>

Port Headings						
Product	Port	Size				
E 3B	Ports I & 2	3/8" NPTF				
E 3B	Port 3	I/4" NPTF				
E 3B	Gage Port	I/4" NPTF				

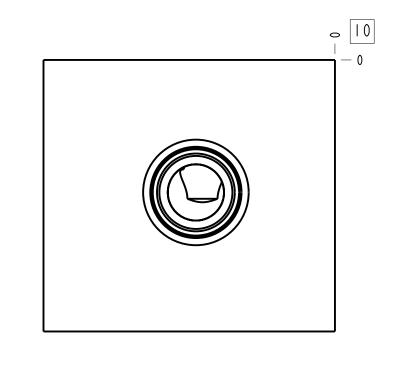

T-IIA Line mount Through port 2 with reverse flow check		A u g - 22 - 24	SCALE	DWG SIZE SHEET	SUD hydra	ulics [®]	
MODEL E 3B			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		FIRST ANGLE THE	HIRD ANGLE	
T E M	PART NO.	SETTING	MATER	IAL		PART NAME	
I	151-159-002		6061-T6 ALUMINUM BODY		BODY		1
2	CXCD-XCN				CHECK VAL	VE	1