





Technical Data	U.S. Units	Metric Units		
Cavity	T - I I A			
Body Features	2 cylinder sequence, with reverse checks			
Body Type	Line mount			
Interface	None			
Open Cavity Quantity	2			
We i ght	2.210 lb.	I,003 kg.		
Mounting Hole Diameter	.34 in.	8.6 mm		
Mounting Hole Depth	Through			
Mounting Hole Quantity	2			
Includes integral cartridge(s)	Yes (see Included Components)			

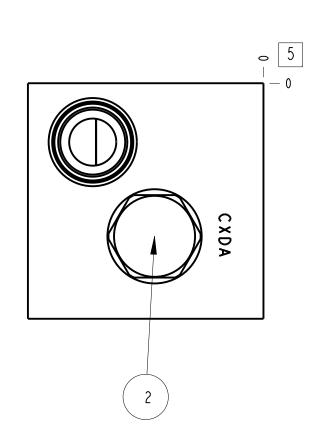

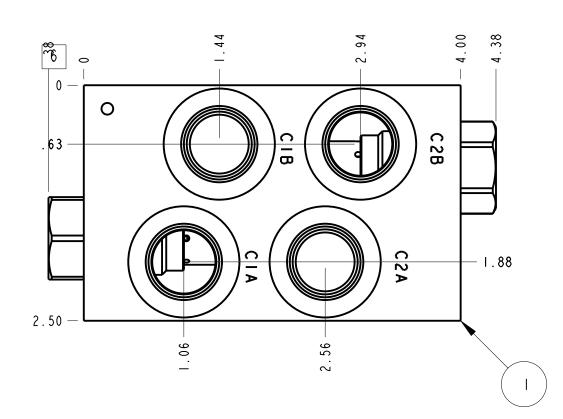

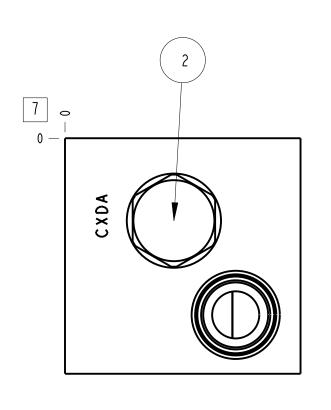

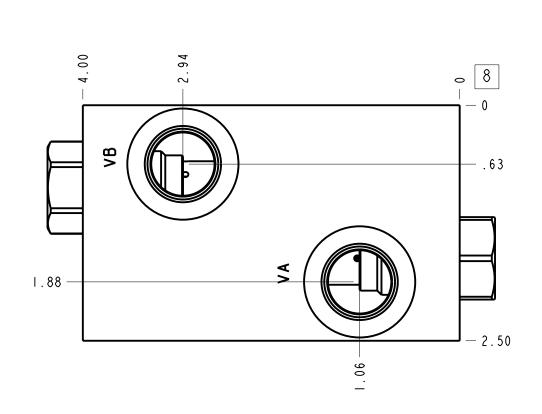

## <u>Notes</u>

- 1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

  2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

0 - 5.		3.69
.31	(SUN) hydraulics	.31
	E8J <date code=""></date>	
2.50 —		

Port Headings			
Product	Port	Size	
E8J	All Ports	SAE 8	

2	CXDA-XCN			CHECK VALVE	2
I	150-839-005		6061-T6 ALUMINUM	BODY	ı
T E M	PART NO.	SETTING	MATERIAL	PART NAME	Q T Y
MODEL	F 8	5.1	ALL DIMENSIONS IN		GLE

E8J	ALL DIME VIEWS AR				
T-IIA Line mount 2 cylinder sequence, with reverse checks	Sep-12-24	0.981	DWG SIZE	SHEET	FUD hydraulic