





Technical Data	U.S. Units	Metric Units		
Cavity	T - I O A			
Body Features	Cross port with make up checks			
Body Type	Line mount			
Interface	None			
Open Cavity Quantity	2			
Weight	2.561 lb.	I, 162 kg.		
Mounting Hole Diameter	.34 in.	8.6 mm		
Mounting Hole Depth	Through			
Mounting Hole Quantity	2			
Includes integral cartridge(s)	Yes (see Included Components)			

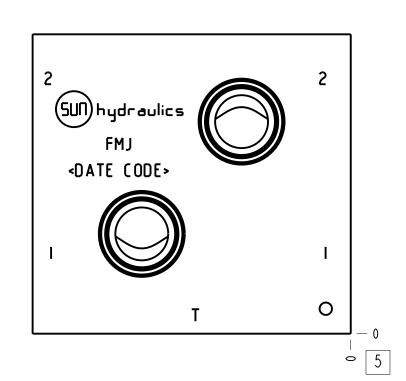

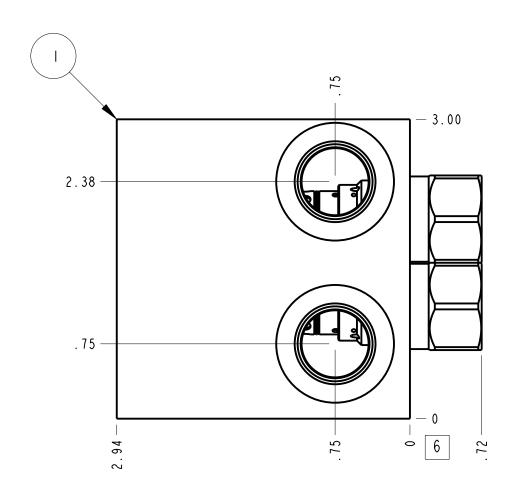

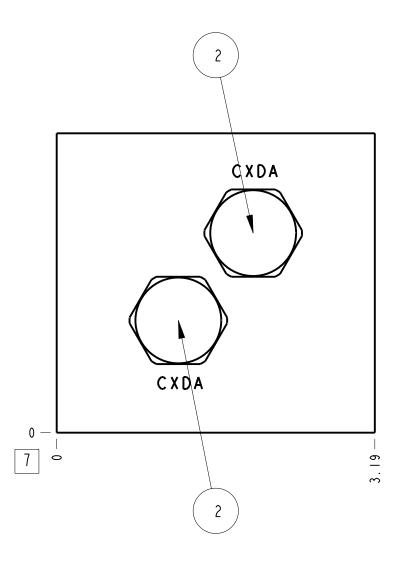

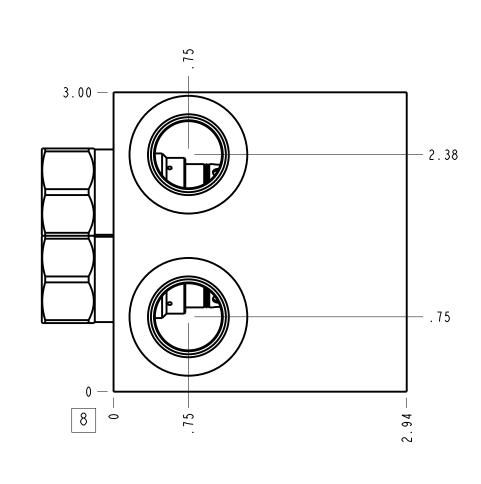

<u>Notes</u>

- 1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

 2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings				
Product	Port	Size		
FMJ	All Ports	SAE 8		

Č	2.94	
. 41 —		O
I.59 —		
2.78 —		
	2.00	

2	CXDAXAN			CHECK VALVE		VE	2	
1	151-170-005		6061-T6 ALUM	6061-T6 ALUMINUM BODY		ODY		
T E M	PART NO.	SETTING	MATER	IAL	PART NAME		Q T Y	
MODEL F M J			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		FIRST ANGLE	THIRD ANGLE		
DESCRI	T-10A Line Cross port with n		A u g - 24 - 23	1.039	DWG SIZE SHEET	SUD hy	draulics®	

MODEL					FIRS
FMJ	ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE				
DESCRIPTION	DATE	SCALE	DWG SIZE	SHEET	
T-10A Line mount Cross port with make up checks	Aug-24-23	1.039	С		9