




Technical Data	U.S. Units	Metric Units		
Cavity	T-IOA Ninety degree with reverse flow check Line mount			
Body Features				
Body Type				
Interface	None I			
Open Cavity Quantity				
Weight	0.939 lb.	0,426 kg.		
Mounting Hole Diameter	.28 in.	7,1 mm		
Mounting Hole Depth	Through			
Mounting Hole Quantity		2		
Includes integral cartridge(s)	Yes (see Included Components)			

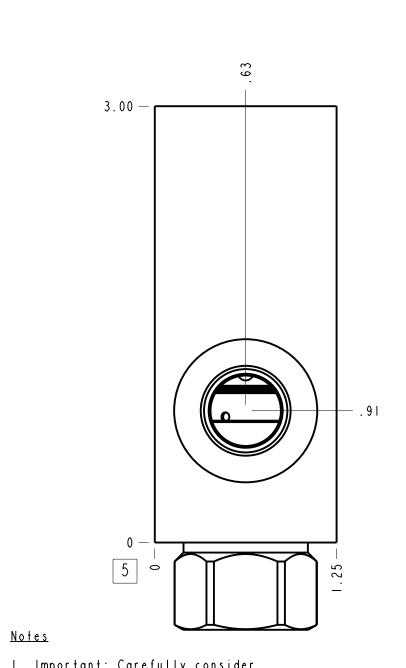

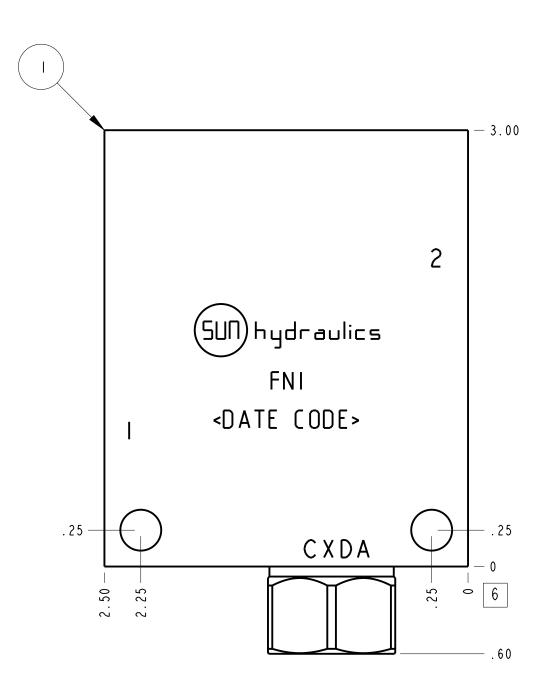

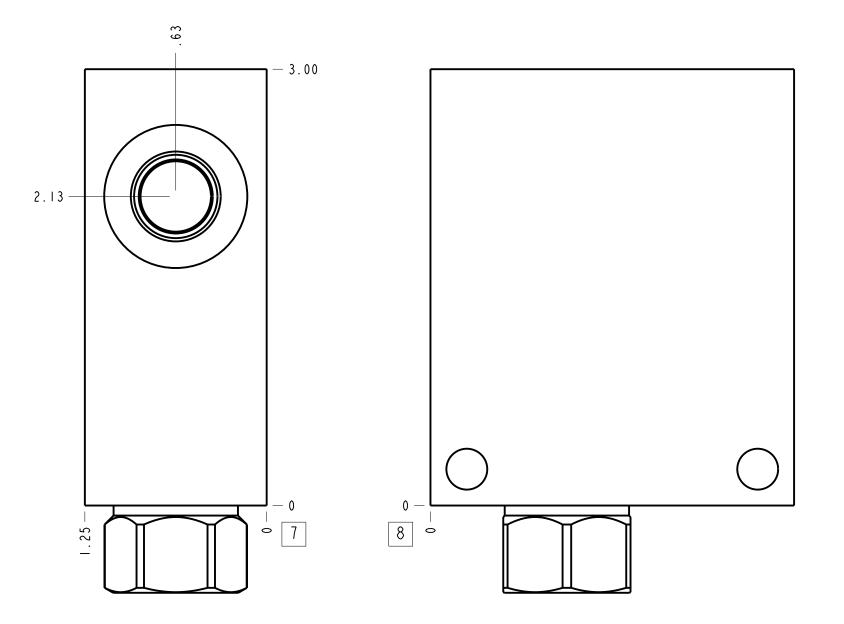

١.	Important: Caretully consider
	the maximum system pressure. The
	pressure rating of the manifold is
	dependent on the manifold material,
	with the port type/size a secondary
	consideration. Manifolds
	constructed of aluminum are not
	rated for pressures higher than
	3000 psi (210 bar), regardless of

<u>Notes</u>

3000 psi (210 bar), regardless of the port type/size specified.

2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

	96.	
		.63
2.50 —		- 0 0 [10]

	Port Headings	
Product	Port	Size
FNI	All Ports	SAE 6

2	CXDAXAN				CHEC	CHECK VALVE		
ı	150-309-004		6061-T6 ALUMI	NUM	BODY			ı
T E M	PART NO.	SETTING	MATER	IAL	PART NAME		Q T Y	
MODEL F N I		ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE			FIRST ANGLE THIRD A	NGLE		
T-10A Line mount Ninety degree with reverse flow check		Jun - 25 - 24	SCALE 1.515	DWG SIZE	SHEET	SUD hydraulic	®	