




| Technical Data | U.S. Units | Metric Units | | | |
|--------------------------------|--|--------------|--|--|--|
| Cavity | T - I 7 A | | | | |
| Body Features | Ninety degree with reverse flow check - reducing | | | | |
| Body Type | Line mount | | | | |
| Interface | N o n e | | | | |
| Open Cavity Quantity | I | | | | |
| Weight | 6.I34 lb. | 2,782 kg. | | | |
| Mounting Hole Diameter | .41 in. | 10,4 mm | | | |
| Mounting Hole Depth | Through | | | | |
| Mounting Hole Quantity | 2 | | | | |
| Includes integral cartridge(s) | Yes (see Included Components) | | | | |

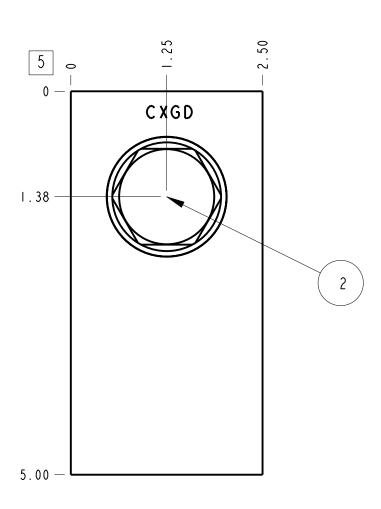

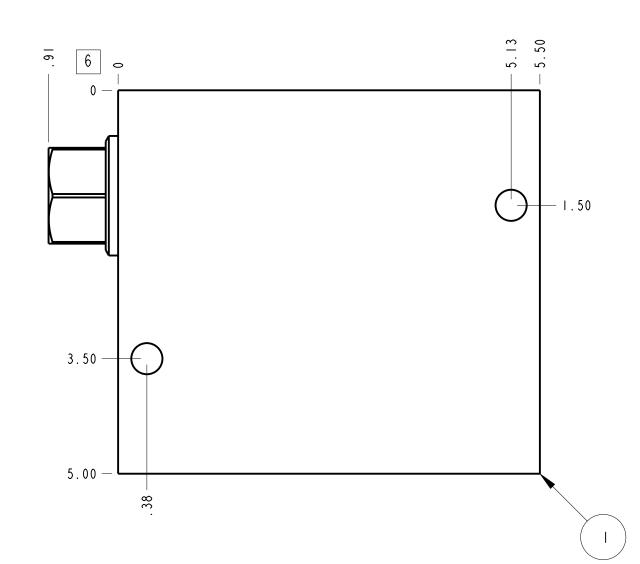

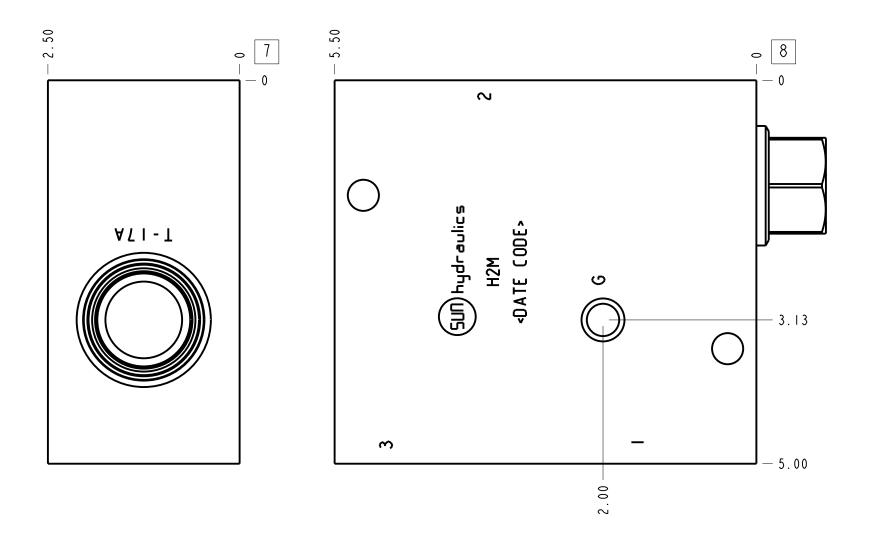


<u>Notes</u>

- 1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

 2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

| Port Headings | | | | | |
|---------------|-------------|-----------|--|--|--|
| Product | Port | Size | | | |
| H2M | Ports I & 2 | SAE 16 | | | |
| H2M | Port 3 | SAE 6 | | | |
| H2M | Gage Port | I/4" NPTF | | | |

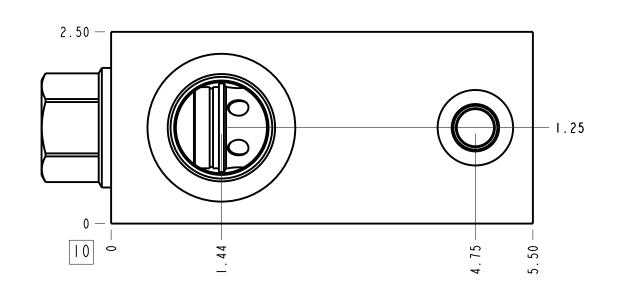

| | | | 1 | | | | | |
|---|-------------|--|---------------|----------|-------|-------------------|-----------------|---|
| 2 | CXGDXCN | | | | CHEC | K VAL | VE | 1 |
| I | 150-755-005 | | 6061-T6 ALUMI | NUM | BODY | | | I |
| T E M | PART NO. | SETTING | MATER | IAL | | PART NAME | | |
| MODEL H2M | | ALL DIMENSIONS IN VIEWS ARE THIRD A | | | | FIRST ANGLE THIRD | ANGLE | |
| T-17A Line mount (See Technical Data for Body Features) | | Nov-01-24 | 0.799 | DWG SIZE | SHEET | SUD hydraulio | e C S | |