




Technical Data	U.S. Units	Metric Units	
Cavity	T - I 6 A		
Body Features	Ninety degree with reverse flow check		
Body Type	Line mount		
Interface	None		
Open Cavity Quantity	I		
We i ght	6.993 lb.	3,172 kg.	
Mounting Hole Thread	.375-16 UNC - 2B in.		
Mounting Hole Depth	.62 in.	15,7 mm	
Mounting Hole Quantity	2		
Includes integral cartridge(s)	Yes (see Included Components)		

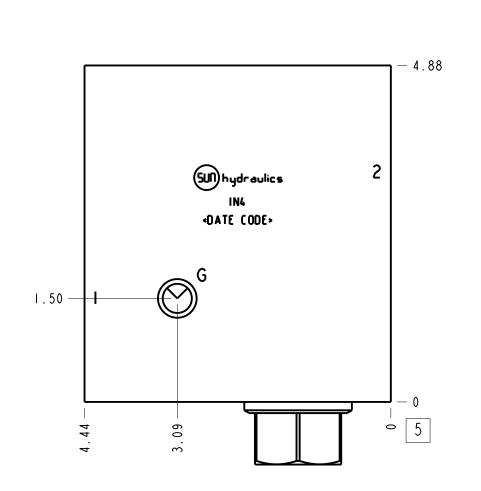

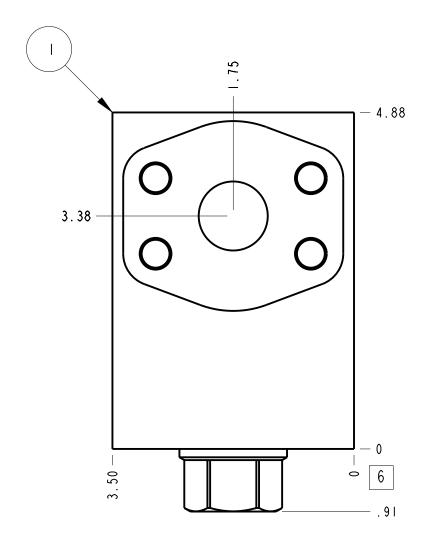


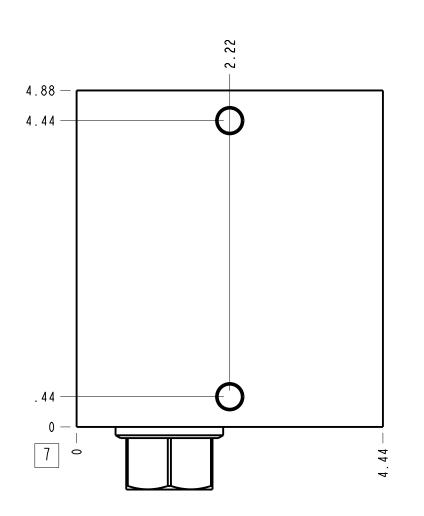

DESCRIPTION

T-16A Line mount

Ninety degree with reverse flow check

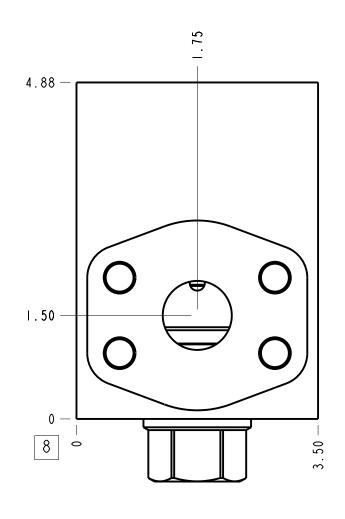


<u>Notes</u>

- 1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

 2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings					
Product	Size				
I N 4	Ports I & 2	I" Code 62			
I N 4	Gage Port	I/4" NPTF			

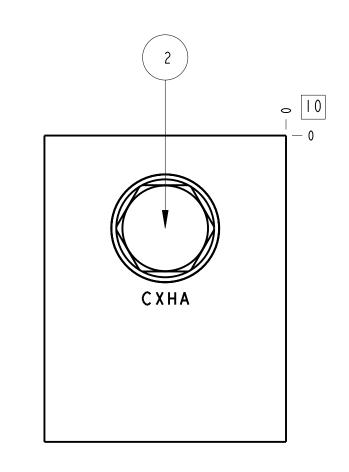

2	C X H A - X A N			CHECK VALVE	1
I	151-944-001		6061-T6 ALUMINUM	BODY	1
T E M	PART NO.	SETTING	MATERIAL	PART NAME	Q T Y
MODEL	MODEL I N 4		ALL DIMENSIONS IN VIEWS ARE THIRD		NGLE

Nov-10-23 0.719

DWG SIZE SHEET

C

FIII hydraulics