
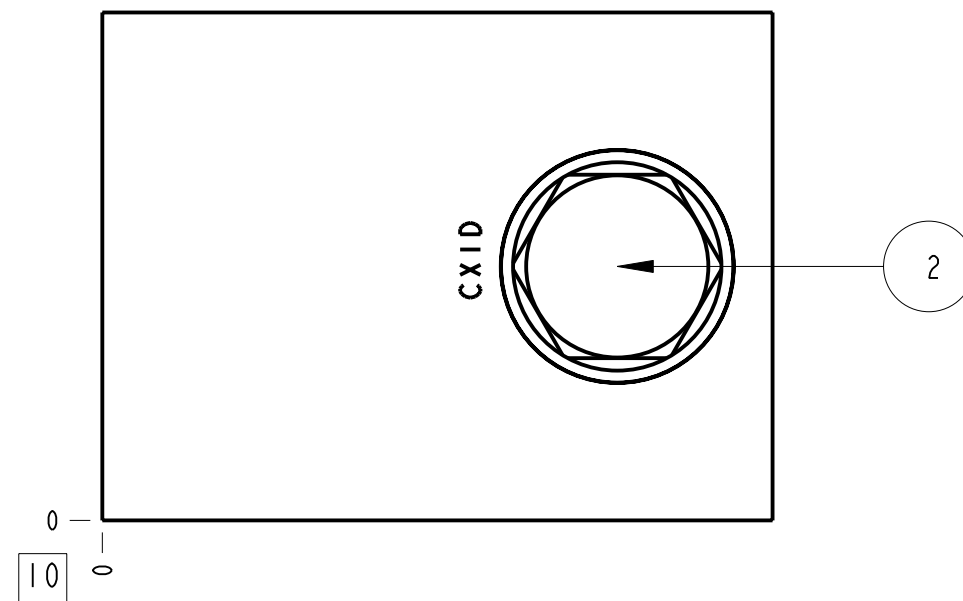
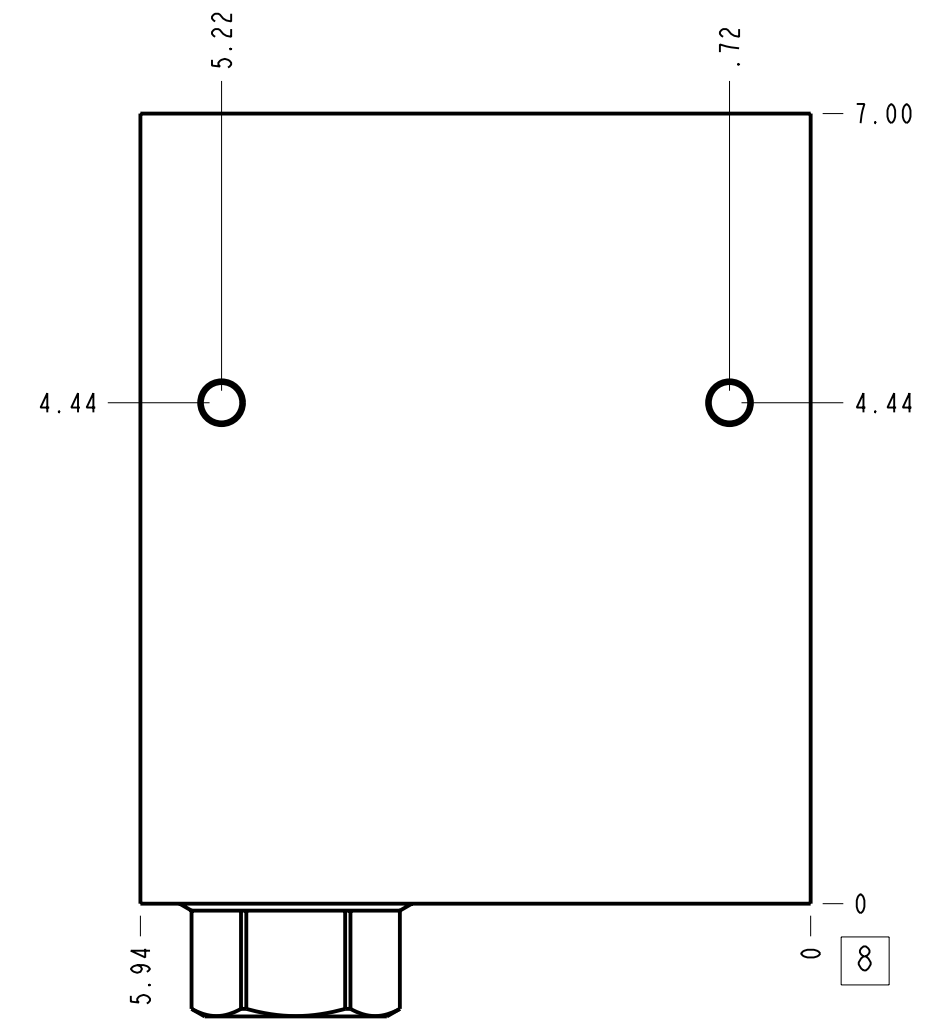
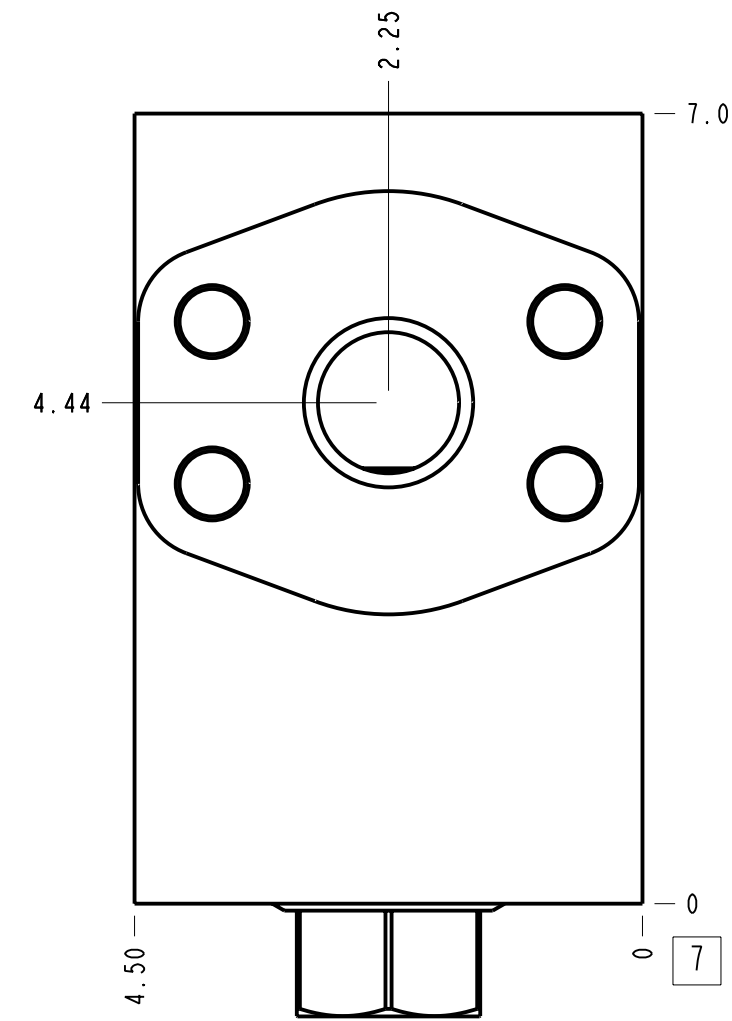
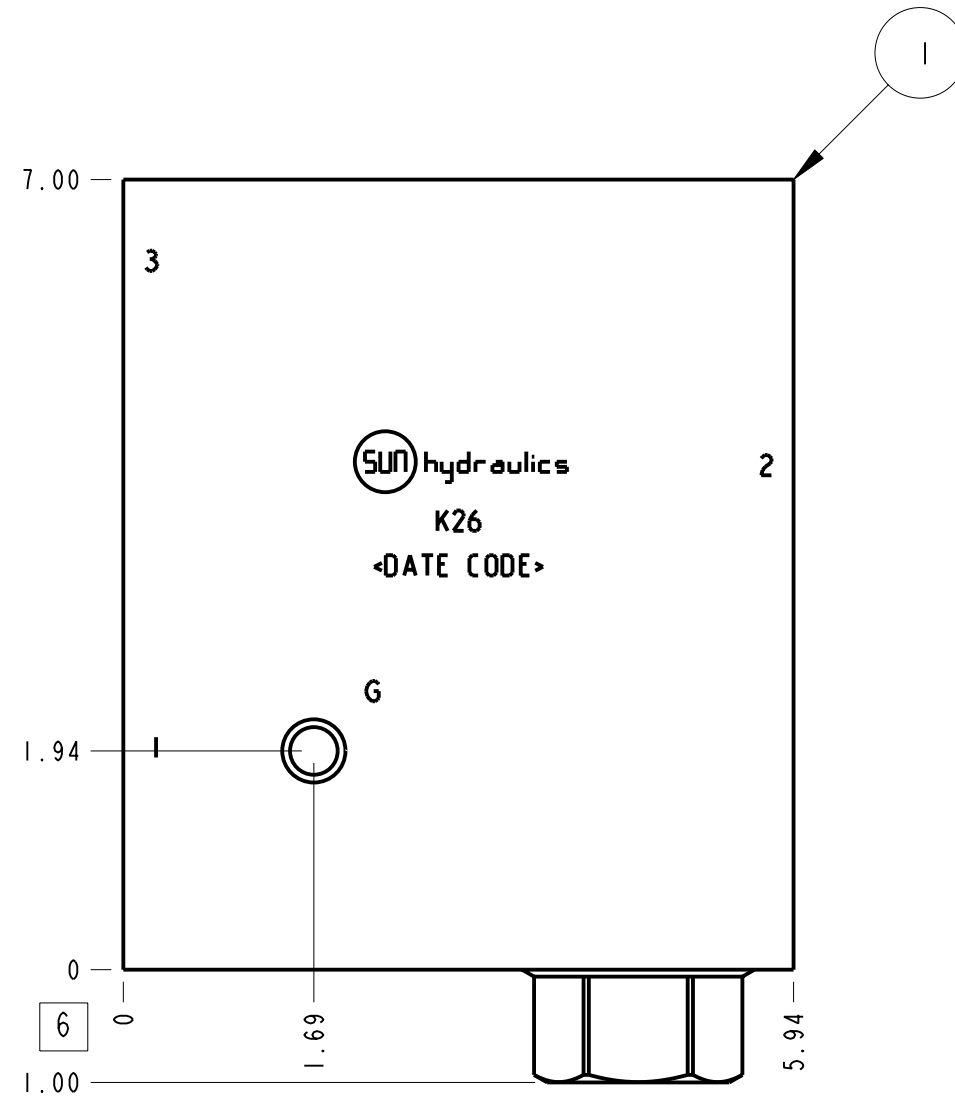


Technical Data	U.S. Units	Metric Units
Cavity	T-19A	
Body Features	Ninety degree with reverse flow check - reducing	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	1	
Weight	16.765 lb.	7,604 kg.
Mounting Hole Thread	.375-16 UNC - 2B in.	
Mounting Hole Depth	.62 in.	15,7 mm
Mounting Hole Quantity	2	
Includes integral cartridge(s)	Yes (see Included Components)	

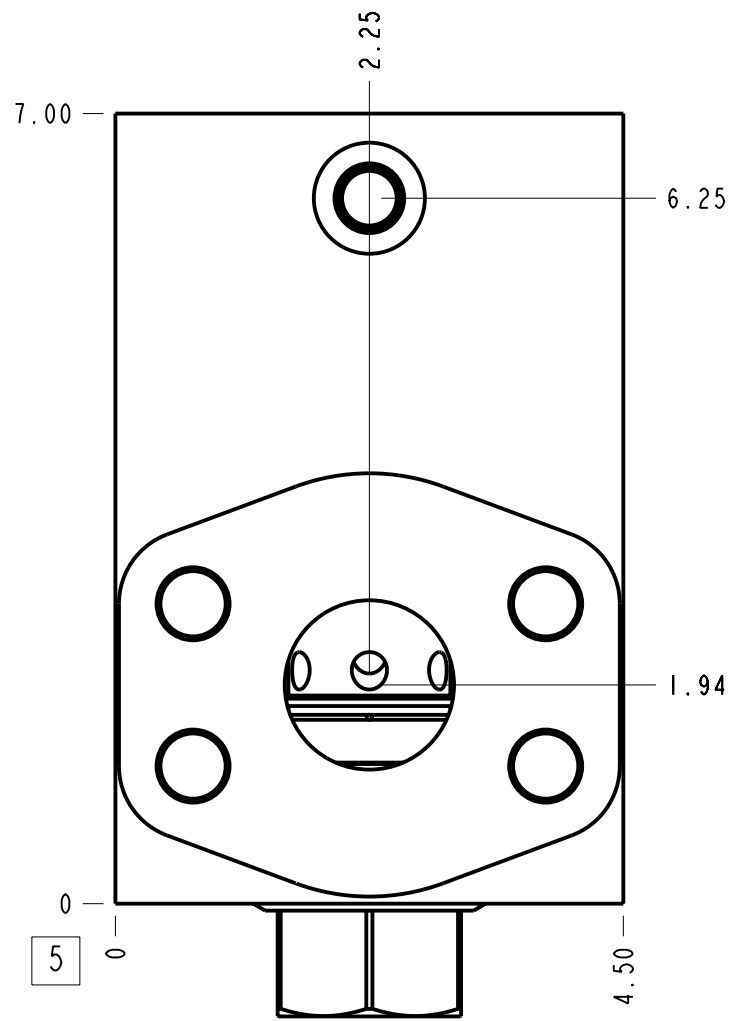

Notes

- Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
- Flange mounting hole data: Inch: 5/8-11 UNC x 1.38 (34,9 mm) DP, Metric: M16
- This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
K26	Ports 1 & 2	1/2" Code 62
K26	Port 3	SAE 6
K26	Gage Port	1/4" NPTF

2	CXID-XCN		CHECK VALVE	1					
1	151-932-001		6061-T6 ALUMINUM	BODY	1				
ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY				
	MODEL		K26						
DESCRIPTION		T-19A Line mount (See Technical Data for Body Features)		DATE	SCALE	DWG SIZE	SHEET	ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE 	
		Sep-24-24	0.588	C	1				