


**Notes**

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
U2T	Ports C2, V1, V2	SAE 8
U2T	Port T	SAE 8

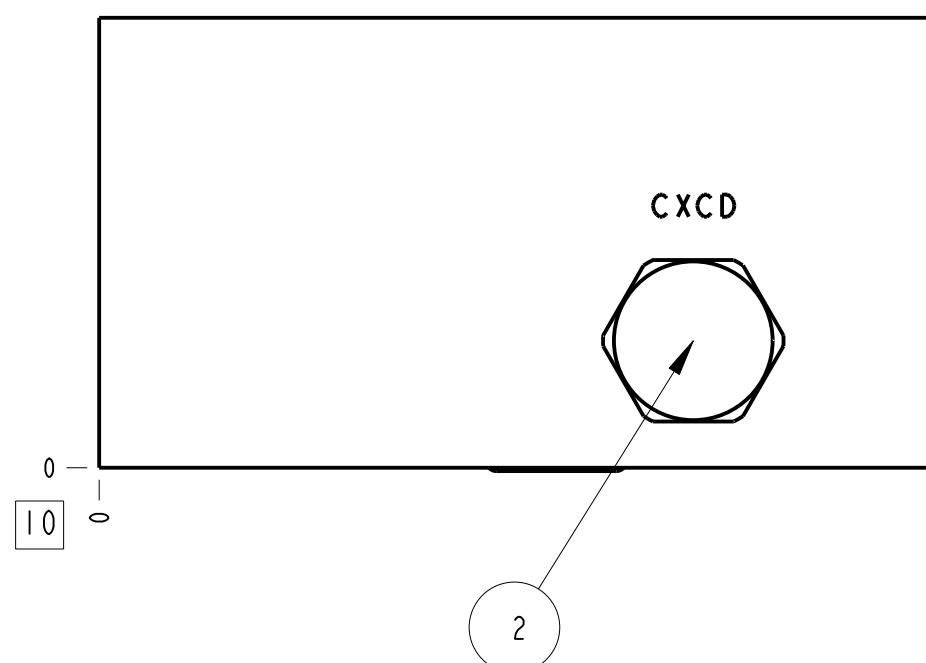

Technical Data	U.S. Units	Metric Units
Cavity	T-11A	
Body Features	Cushion lock with make up checks	
Body Type	Gasket mount	
Open Cavity Quantity	2	
Weight	3.727 lb.	1,691 kg.
Mounting Hole Diameter	.34 in.	8.6 mm
Mounting Hole Quantity	2	
Mounting Hole C'bore Diameter	.53 in.	13,5 mm
Mounting Hole C'bore Depth	.25 in.	6,4 mm
Includes integral cartridge(s)	Yes (see Included Components)	

3	500-001-113		N-0674-70	O-RING	1	
2	CXCD-XCN			CHECK VALVE	2	
1	171-073		6061-T6 ALUMINUM	BODY	1	
ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY	
	MODEL U2T			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE	FIRST ANGLE	THIRD ANGLE
DESCRIPTION T-11A Gasket mount Cushion lock with make up checks			DATE Aug-15-24	SCALE 0.961	DWG SIZE C	SHEET 1

