


Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

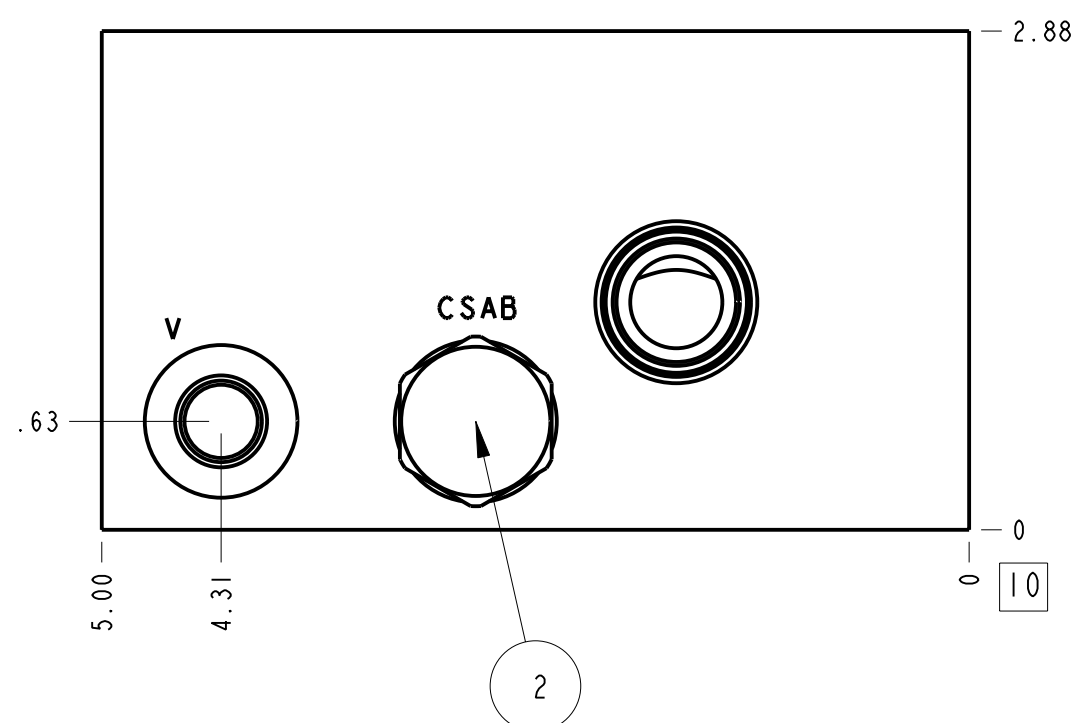

Port Headings		
Product	Port	Size
XOU	Ports 1 & 2	3/8" BSPP
XOU	Port V	1/4" BSPP
XOU	Gage Ports	1/4" BSPP

Technical Data	U.S. Units	Metric Units
Cavity	T-11A	
Body Features	Cross port with shuttle on port 3s	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	2	
Weight	5.789 lb.	2,626 kg.
Mounting Hole Diameter	.42 in.	10,7 mm
Mounting Hole Depth	Through	
Mounting Hole Quantity	2	
Includes integral cartridge(s)	Yes (see Included Components)	

2	CSAB-XXN			SHUTTLE VALVE	1
1	152-137-010		6061-T6 ALUMINUM	BODY	1
ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY
	MODEL		XOU		
DESCRIPTION			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		
T-11A Line mount Cross port with shuttle on port 3s			DATE	SCALE	DWG SIZE SHEET
			Sep-19-23	0.903	C 1
					 SUN hydraulics