

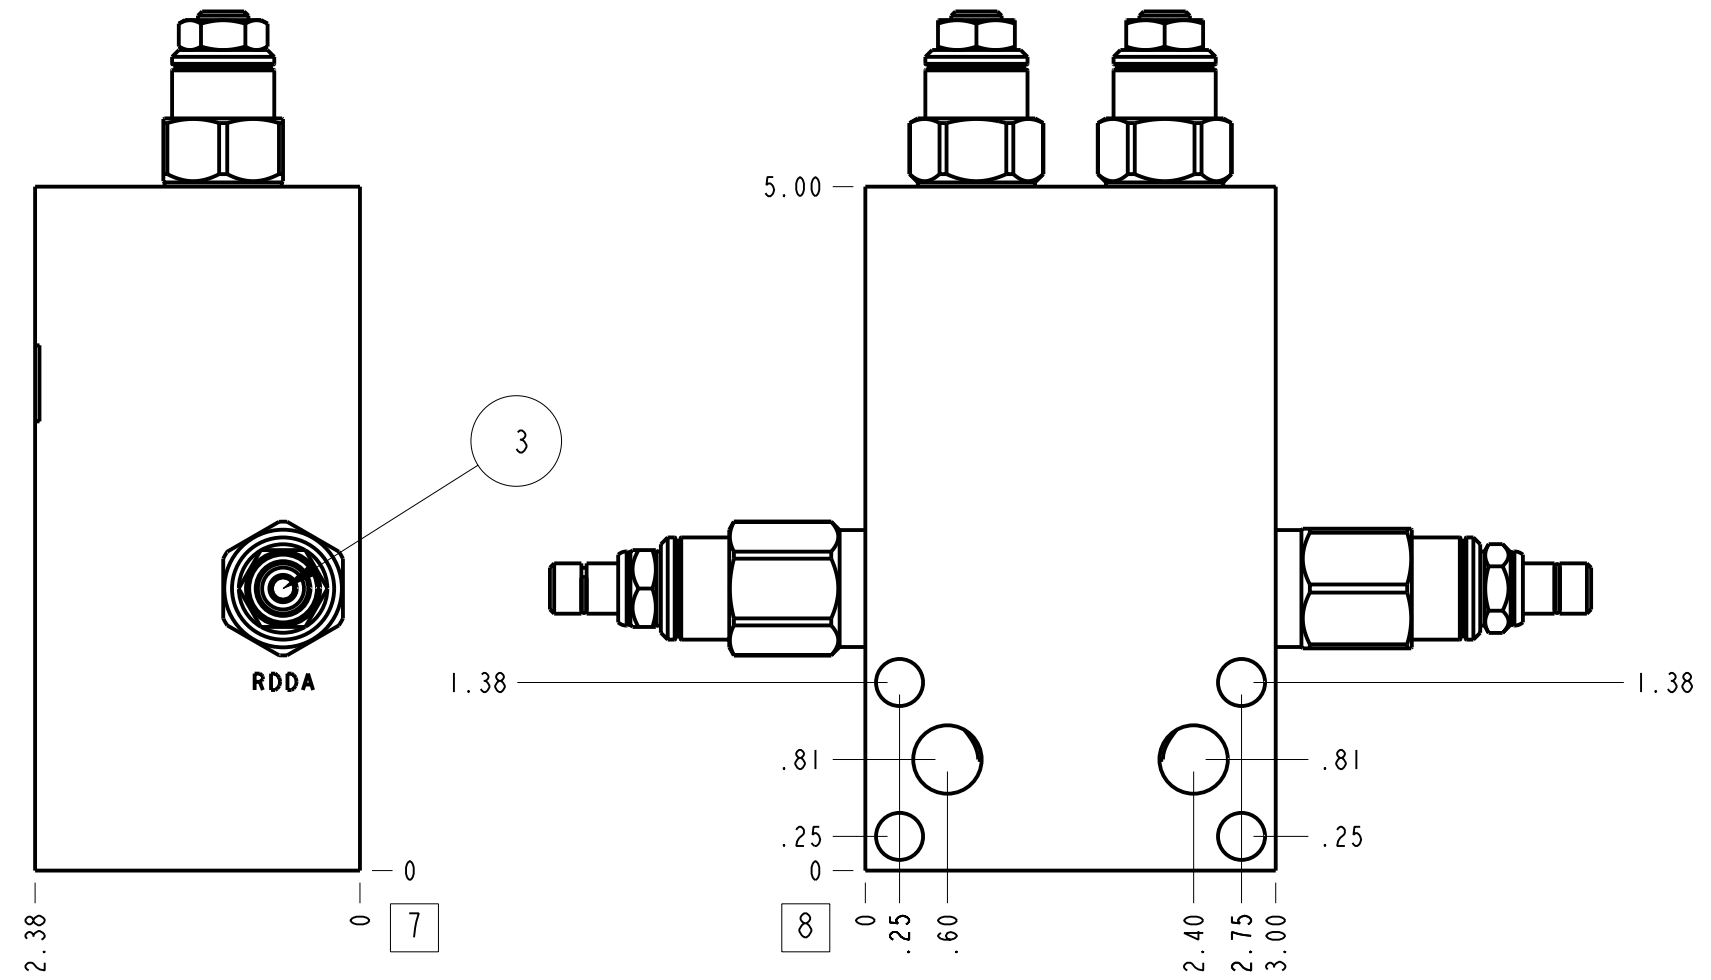
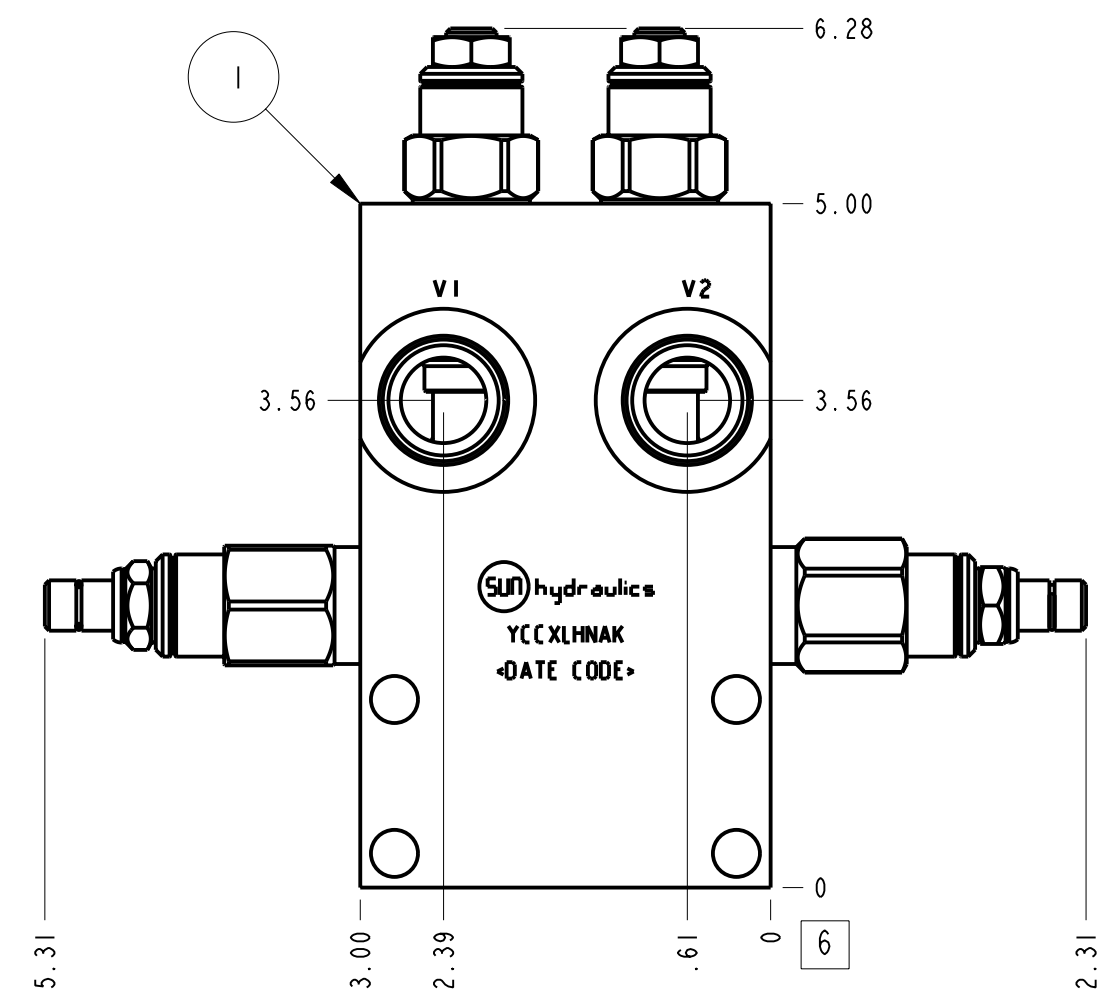


Technical Data	U.S. Units	Metric Units
Body Type	Motor mount	
Interface	Eaton/Char-Lynn H & S	
Weight	3.191 lb.	1,447 kg.
Capacity	15 gpm	60 L/min.

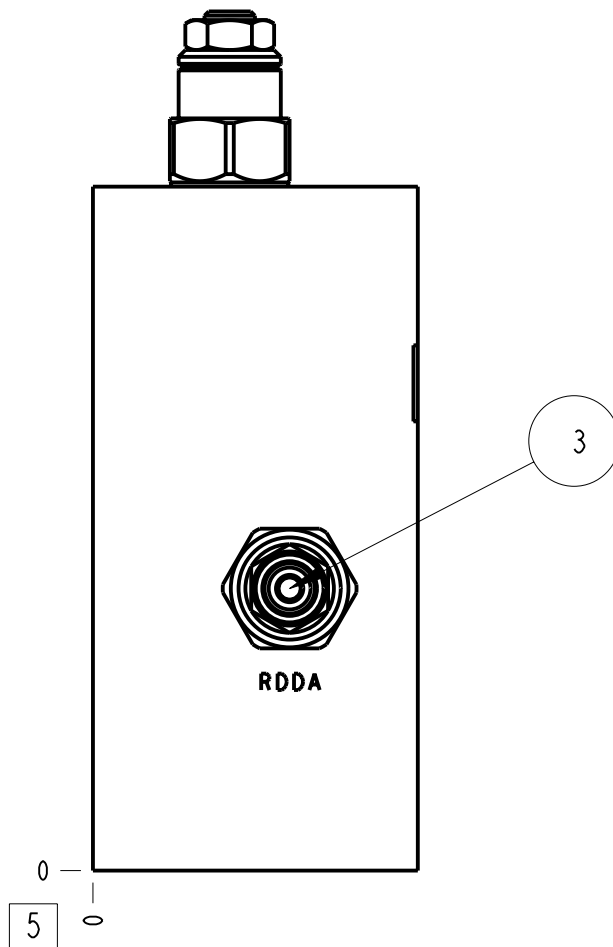

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. For detailed information regarding the cartridges contained in this assembly, click on the models codes shown in the Included Components tab.
3. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

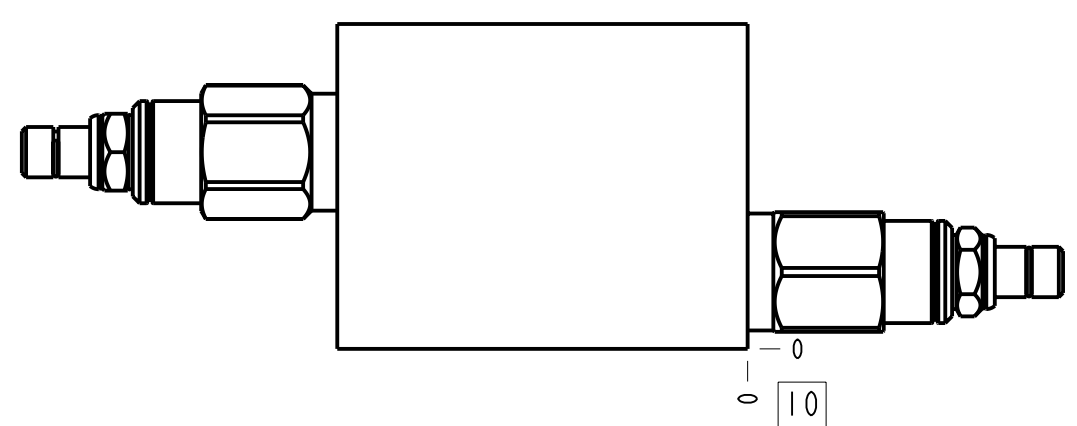

Port Headings		
Product	Port	Size
YCCXLHNAK	Ports V1 & V2	SAE 10

3	RDDA-LAN			RELIEF VALVE	2
2	CBCA-LHN			COUNTERBALANCE VALVE	2
1	152-038-004		6061-T6 ALUMINUM	BODY	1
ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY
MODEL			YCCXLHNAK	ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE	
DESCRIPTION			Motor mount Eaton/Char-Lynn H & S	DATE	SCALE
				Oct-28-24	0.712
				DWG SIZE	SHEET
				C	1

