





Technical Data	U.S. Units	Metric Units			
Body Type	Line mount				
We ight	2.504 lb.	I,136 kg.			
Capacity	40 gpm	I60 L/min.			
Mounting Hole Diameter	.41 in.	10,4 mm			
Mounting Hole Depth	Through				
Mounting Hole Quantity	2				

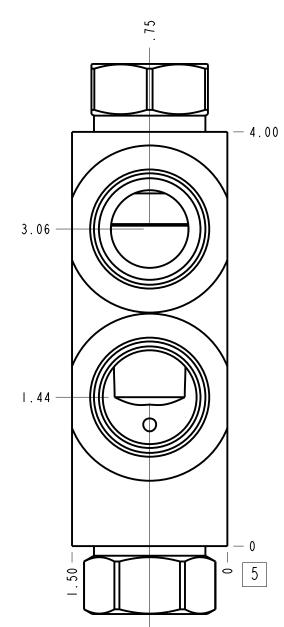

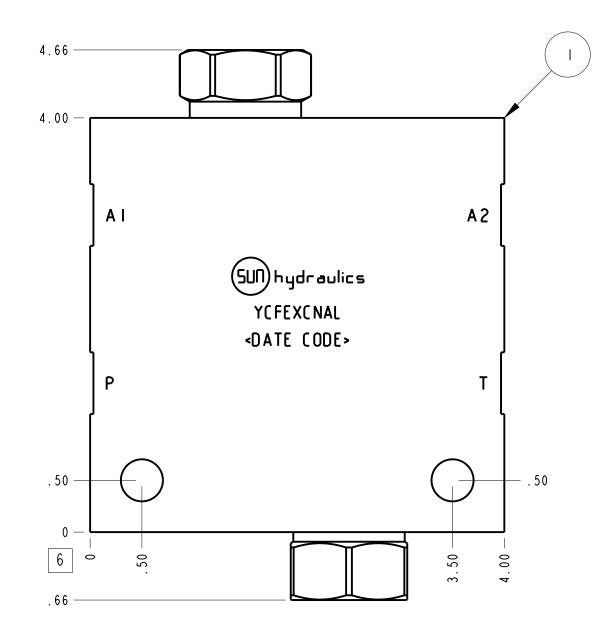

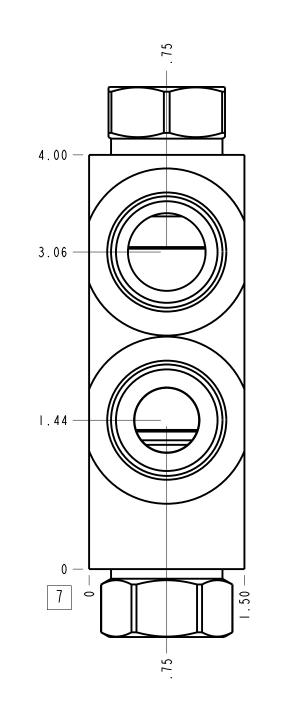

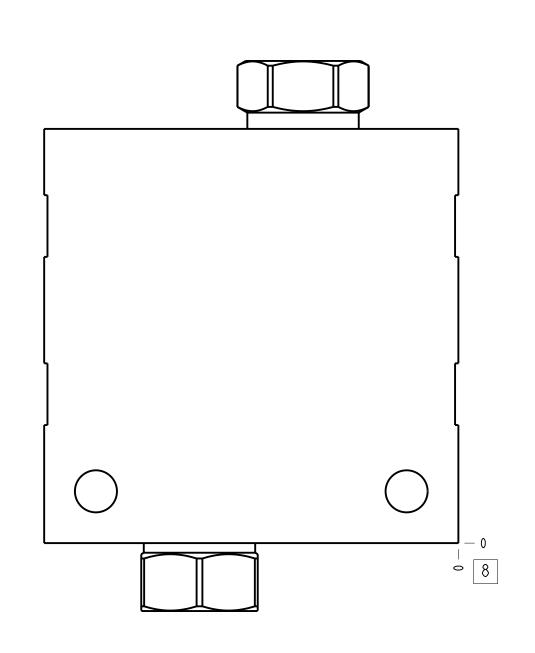

١.	Important: Carefully consider
	the maximum system pressure The
	pressure rating of the manifold is
	dependent on the manifold material,
	with the port type/size a secondary
	consideration. Manifolds
	constructed of aluminum are not
	rated for pressures higher than
	3000 psi (210 bar), regardless of
	the port type/size specified.
2	For dotailod information

<u>Notes</u>

the port type/size specified.
2. For detailed information regarding the cartridges contained in this assembly, click on the models codes shown in the Included Components tab.
3. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

0 -	
	COF A

3	COFA-XAN				CHECK V	CHECK VALVE		
2	CXFA-XCN				CHECK V	CHECK VALVE		
I	150-207-012		6061-T6 ALUMI	NUM	BODY	BODY		
T E M	PART NO.	SETTING	MATER	I A L		PART NAME	Q T Y	
MODEL YCFEXCNAL		ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		ANGLE				
DESCRIPTION Line mount		Mar - 08 - 24	SCALE 1.079	DWG SIZE SHEE	FUD hydraulio	®		

Port Headings Port Product Size YCFEXCNAL Ports P, T, AI, A2 SAE 12

YCFEXCNAL	ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE				
DESCRIPTION Line mount	Mar - 08 - 24	1.079	DWG SIZE	SHEET	E